


## Bay & Bow Window Size to Order When Brickmould is Used

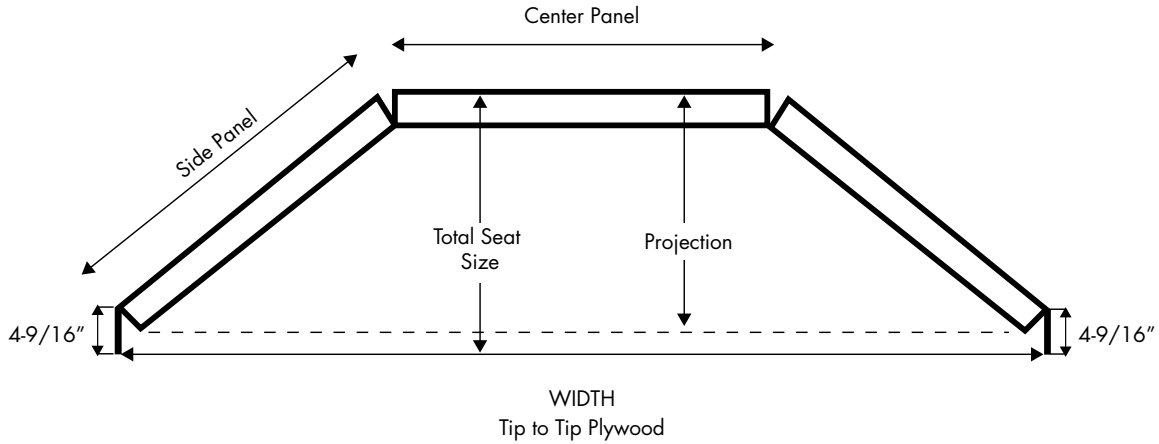

BRICK TO BRICK = 60" WIDTH LESS 3/8" ON WIDTH (AND HEIGHT) FOR CAULKING = 59 5/8"

Deductions to apply with 1-1/4" Brickmould

30° Bay	<b>Width:</b> 59-5/8" less 1.75" = 57.875" <b>Height:</b> 59-5/8" less 1" = 58.625"
45° Bay	<b>Width:</b> 59-5/8" less 1.875" = 57.75" <b>Height:</b> 59-5/8" less 1" = 58.625"
10° 4 Sections	<b>Width:</b> 59-5/8" less 1.5" = 57.125" <b>Height:</b> 59-5/8" less 1" = 58.625"
10° 5 Sections	<b>Width:</b> 59-5/8" less 1.5" = 57.125" <b>Height:</b> 59-5/8" less 1" = 58.625"
20° 4 Sections	<b>Width:</b> 59-5/8" less 1.75" = 57.875" <b>Height:</b> 59-5/8" less 1" = 58.625"
20° 5 Sections	<b>Width:</b> 59-5/8" less 1.875" = 57.75" <b>Height:</b> 59-5/8" less 1" = 58.625"
30° 4 Sections	<b>Width:</b> 59-5/8" less 1.875" = 57.75" <b>Height:</b> 59-5/8" less 1" = 58.625"
30° 5 Sections	<b>Width:</b> 59-5/8" less 1.75" = 57.875" <b>Height:</b> 59-5/8" less 1" = 58.625"